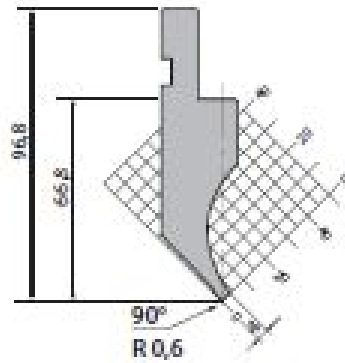
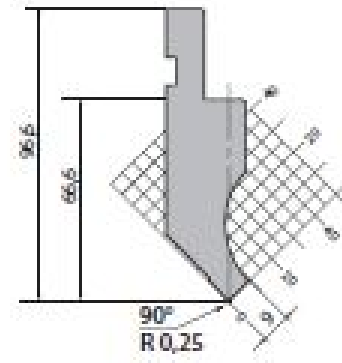
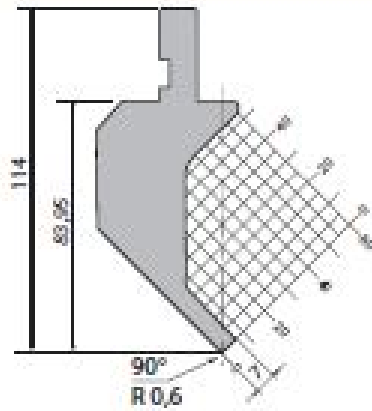


AP 97.90.R06**350 kN/m max.**


835 mm	10,6 kg
835 mm section	10,6 kg
415 mm	5,2 kg

AP 97.90.R025**1000 kN/m max.**


835 mm	10,8 kg
835 mm section	10,8 kg
415 mm	5,4 kg

AP 114.90.R06**200 kN/m max.**


835 mm	13,8 kg
835 mm section	13,8 kg
415 mm	7,0 kg

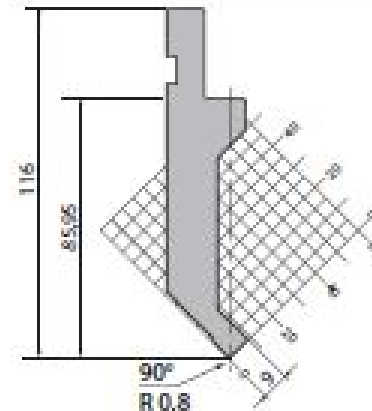AP 116.90.R08**400 kN/m max.**

835 mm	12,8 kg
835 mm section	12,8 kg
415 mm	6,6 kg

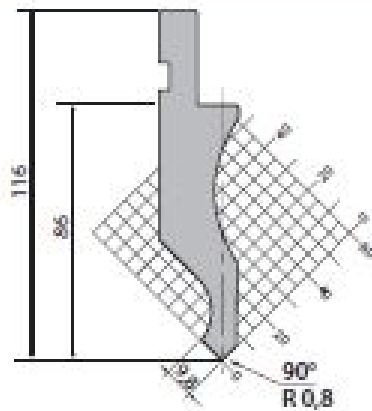AP 116.90.R08S**500 kN/m max.**

835 mm	13,0 kg
835 mm section	13,0 kg
415 mm	6,4 kg

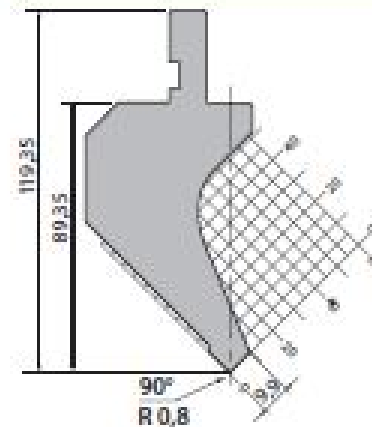AP 120.90.R08**600 kN/m max.**

835 mm	20,8 kg
835 mm section	20,8 kg
415 mm	10,6 kg